


Wider Opening with Double-Sliding Doors

Maximize opening space in limited areas an open design for an elegant entrance

TE-300 (Single/Bi-parting)

Office building	Apartment building	Commercial facility
Financial institution	Factory	Hospital

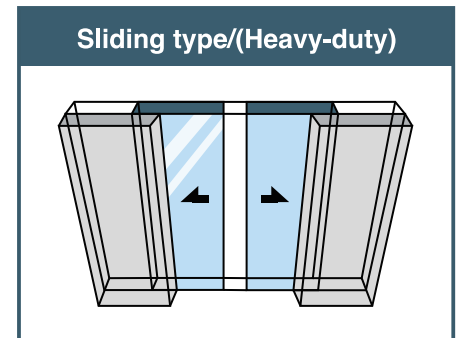

Product features


Door opening is twice the fixed door width.

Ensures a wide opening even in spaces with limited pocket depth.


Equipped with a system operating two doors at a 2:1 speed ratio.

Convenient for moving large items and during events.

【Vertical Section View】

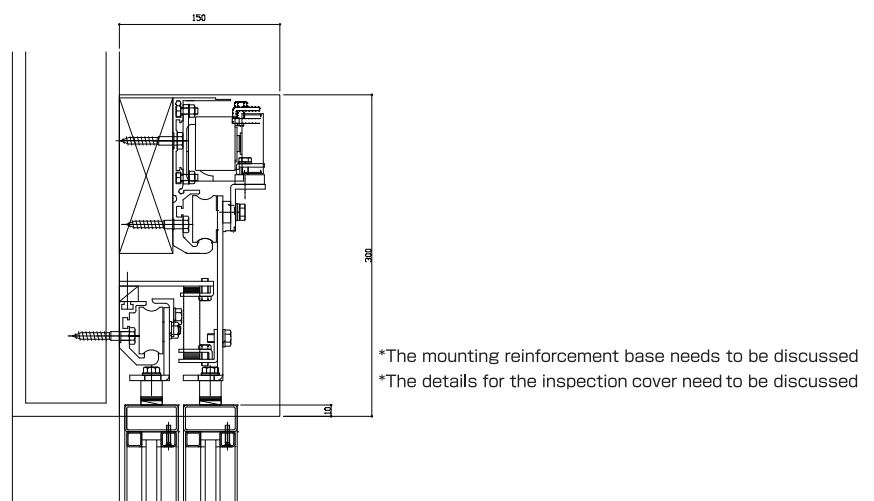

【Inspection Opening Side View】

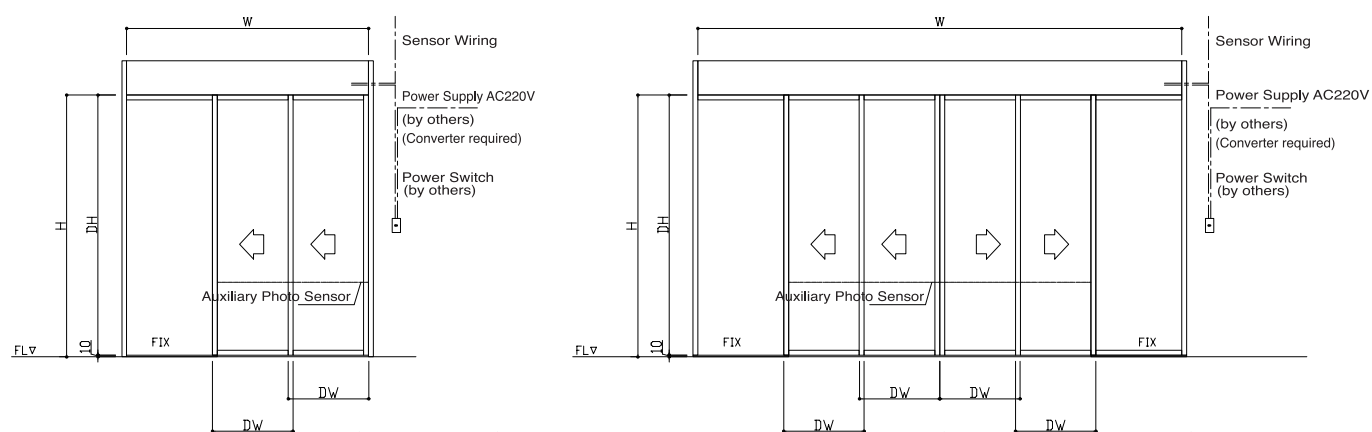

【Specifications】

Model name	TES	TED
Door opening/closing type	Single	Bi-parting
Operator mounting method	Custom sash integration	
Applicable door weight (kg)	110kg×2	75kg×4
Applicable door area (m²)	Max.3.0	Max.2.4
Applicable door width: DW (mm)	650-1000	
Supported aspect ratio (height: width)	Max.4.5:1	
Power supply	AC 100V (Voltage conversion required for AC220V)	

